




EFFICIENCY PLUS SERIES

HOT WATER STORAGE TANKS

NOMINAL STORAGE SIZES*		FEATURES	QUALITY CONSTRUCTION
EPP-40-ST	40 US Gal.	<ul style="list-style-type: none"> • Low Standby Heat Loss 	<ul style="list-style-type: none"> • AISI 316L Stainless Steel Tank
EPP-60-ST	60 US Gal.	<ul style="list-style-type: none"> • Aquastat and Sensor-well 	<ul style="list-style-type: none"> • Passivated Corrosion Protection
EPP-80-ST	80 US Gal.	<ul style="list-style-type: none"> • Sacrificial Anode 	<ul style="list-style-type: none"> • Baked Enamel Finish
EPP-120-ST	119 US Gal.	<ul style="list-style-type: none"> • Non-toxic Fiberglass Insulation 	<ul style="list-style-type: none"> • Factory Hydrostatic Test
ST = Storage Tank		<ul style="list-style-type: none"> • Optional Insulating Blanket** 	<ul style="list-style-type: none"> • 10 Year Warranty***

<p>Maximum Temperature: 150°F</p> <p>Maximum Pressure: 150 psi</p>	<p>Notes:</p> <p>* Custom sizes and configurations available. Contact factory for details.</p> <p>** Optional insulating blanket available to meet ASHRAE 90.1</p> <p>*** See printed warranty for details.</p>
--	--

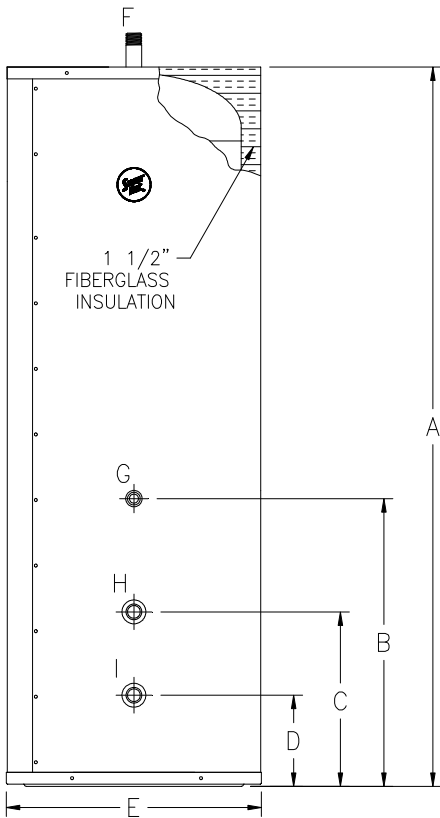

DIMENSIONS					
Model	A	B	C	D	E
EPP-40-ST	42 5/16"	24 1/8"	14 5/8"	7 5/8"	21 3/8"
EPP-60-ST	60 5/16"	24 1/8"	14 5/8"	7 5/8"	21 3/8"
EPP-80-ST	63 5/16"	26 3/4"	17 1/4"	10 1/4"	23 1/8"
EPP-120-ST	64 5/8"	27 3/16"	17 11/16"	10 11/16"	27 1/8"

CONNECTIONS (NPT Nipples)					
Model	F Hot Water Outlet	G Aquastat Coupling	H Re-circ.	I Cold Water Inlet	Shipping Weight
EPP-40-ST	1"	1/2"	1"	1"	129 lb
EPP-60-ST	1"	1/2"	1"	1"	167 lb
EPP-80-ST	1 1/4"	1/2"	1 1/4"	1 1/4"	183 lb
EPP-120-ST	2"	1/2"	2"	2"	221 lb

*specifications subject to change without notice.



ALLIED ENGINEERING COMPANY
 94 Riverside Drive • North Vancouver, BC • V7H 2M6
 Tel: 604-929-1214 • Fax: 604-929-5184

www.alliedboilers.com
 e-mail: sales@alliedboilers.com

5361839