



SPACE-SAVER COMBO


INDIRECT FIRED HOT WATER TANKS

EFFICIENCY PLUS SERIES


Storage Size (Nominal)		Recovery (Based on Boiler Flow Rate of 10 GPM)						
SSC-40	40 US Gal.	MODEL NUMBER	Inlet From Boiler Temp. °F	1 st 10 Min. Delivery @ 135°F US Gal.	1 st Hour Delivery @ 135°F US Gal.	Continuous Delivery @ 115°F US GPH.	Thermal Input Requirements Btu/hr	
Available with single coil only.		SSC-40	200	66	194	226	129,000	
			190	63	176	205	117,000	
			180	60	159	184	105,000	
Benefits								
<ul style="list-style-type: none"> Fast Recovery Highest Efficiency Ten Year Warranty Easy Installation 		Model Number	A - Hot Water Outlet	B - Cold Water Inlet	C - Inlet from Boiler	D - Outlet to Boiler		
		SSC-40	3/4"	3/4"	1"	1"		
Quality Construction								
<ul style="list-style-type: none"> Passivated High Grade 316 Stainless Steel Tank Removable Front Door for Easy Tank Replacement Nontoxic Fiberglass Insulation Magnesium Anode 		Maximum Operating Pressure: 150 psi			Weight: 140 LB			
		Maximum Tank Temperature: 150°F						
			Maximum Coil Temperature: 210°F					

Dimensions:

ITEM	QTY	DESCRIPTION
1	1	DOOR
2	1	3/4" NPT (0.840" DIA) X 25" MG ANODE
3	1	3/4" WATTS T&P VALVE (LL100XL-3M7)
4	1	WHITE PLASTIC GROMMETS
5	1	1/2" THERMOWELL AND AQUASTAT
6	1	1 1/2" THICK INSULATION (NOT SHOWN)

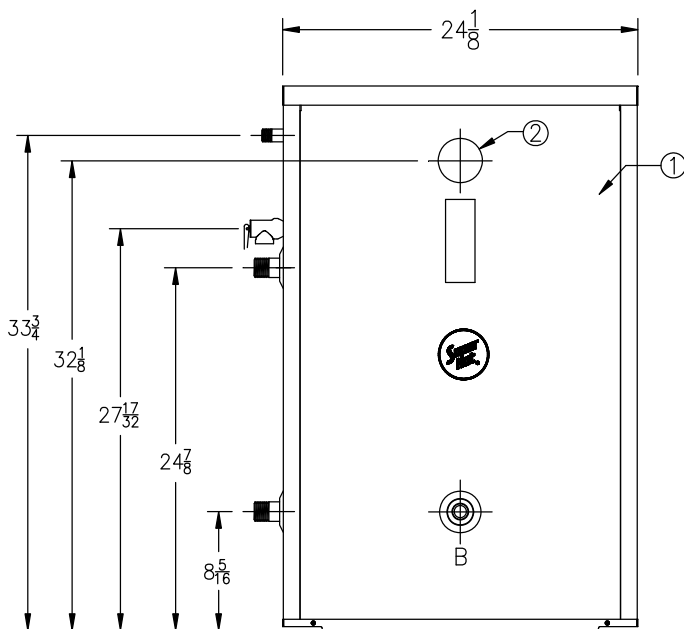

FRONT VIEW

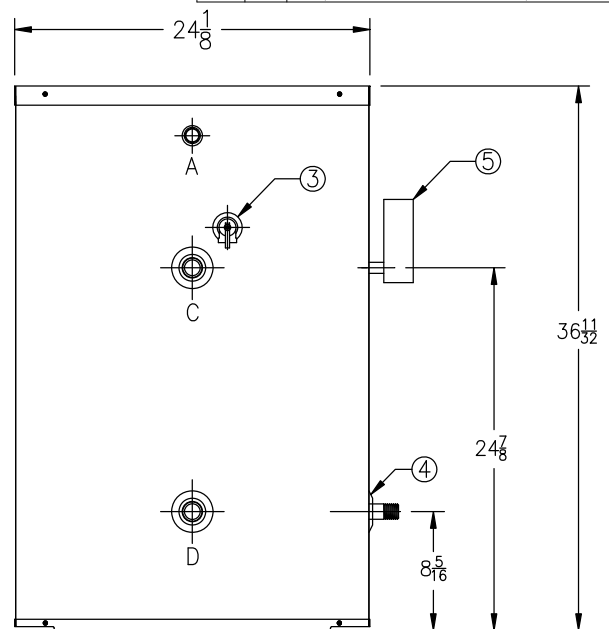

LEFT VIEW

Tel: (604)-929-1214
Fax: (604)-929-5184

ALLIED ENGINEERING COMPANY
94 Riverside Drive • North Vancouver, B.C. • V7H 2M6

